

# Tech Lift 500

# 0.5m Steplift for your Home


- Indoor or Outdoor
- Quick Delivery
- Competitively Priced
- One day installation
- 3 Year Warranty\*
- Ultra Slim & Lightweight Design
- Easy to use
- No Specialist Builders Work Required



#### **Features**

### Standard Features


Tech Lift 500 Platform Lift provides a practical solution to the challenge of vertical lift travels up to 500mm. It provides a safe and easy way to gain access to a property where stairs would otherwise prevent wheelchair access, into your home or gardens.

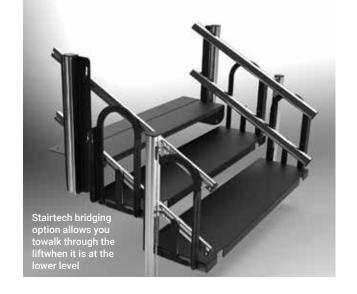



- O1 Suitable for outdoor installations at no extra cost (IP65 rated)
- O4 Plexi-glass protective side panels
- Ultra-slim due to scissor lifting mechanism
- Aluminium platform flooring with Anti-slip strips
- 03 Aluminium (silver) Framework
- O6 Powered folding ramp (no need for a pit)

#### **Features**

## **Delivery & Installation**










Can be relocated

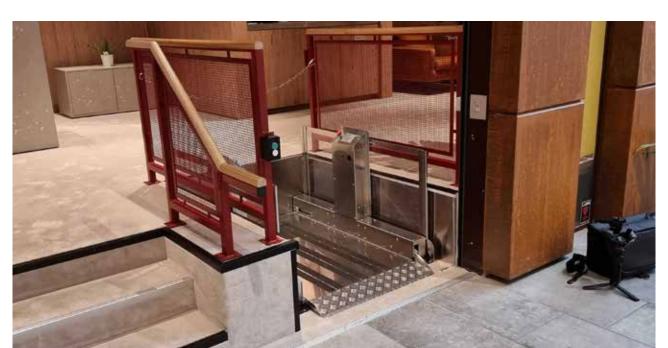

#### **Features**

## **Optional Features**

#### Protection

■ Single swing manual gate at upper level

## Landing Buttons & Hand-held Controls

- Wireless wall mounted call station:
  - 'Call' (1 button)
  - 'Call & Send' (2 buttons)
  - 'Call & Send' + key locking (2 buttons)
- Hand held key fob transmitter

#### Step Bridging Options

- Steplift Bridging Solution Bridge one step up to 275mm deep
- Stairtech Bridging Solution Bridge up to 3 steps

#### Lift Colour

■ Pick a colour of your choice from the RAL colour chart



#### **Specification**

## Tech Lift 500: Technical Specification

Environment	Indoors & Outdoors
Lifting Height	30mm min - 500mm max (1.2" - 19.5" approx) / 2 stops
Platform Size	800mm (W) x 1250mm (L)
Footprint of Lift	1050mm (W) x 1429mm (L) (excluding any bridging step solutions)
Lifting Capacity (max)	250kg
Unit Weight	51kg
Travel Speed	25mm/sec max
Entrance Configuration(s)	Through Access
Top Door Type	Manual Single Swing – (optional)
Flooring Type(s)	Aluminium with anti-slip strips
Lift Colours / Finishes	Aluminium (silver) or RAL colour of your choice (optional)
Landing Push Buttons	Wireless
Fixing Method(s)	Floor Mounted (no specialist builders work required)
Power Supply Requirement	220v Single Phase, 10 amp
Noise Level	52 dB (A)
Conformity	EN-81-41:2010: Safety rules for the construction and installation of lifts
Warranty	3 Years* parts and labour (including two service visits in the first year)





## Contact

#### **Level Access Lifts Ltd**

t: 023 8081 4924

e: sales@levellifts.co.uk

w: levellifts.co.uk



